


SIDEWALK ADJACENT TO CURB

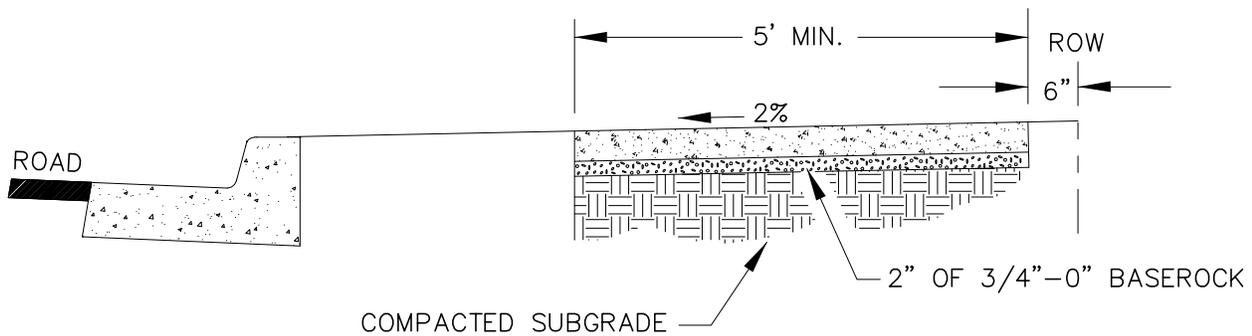

SIDEWALK AWAY FROM CURB

NOTES:

1. CONCRETE SHALL BE 3000 P.S.I. AFTER 28 DAYS, 6 SACK MIX, SLUMP RANGE OF 1-1/2" TO 3".
2. PANELS TO BE 5 FEET LONG.
3. EXPANSION JOINTS TO BE PLACED AT SIDES OF DRIVEWAY APPROACHES, UTILITY VAULTS, WHEELCHAIR RAMPS, & AT SPACING NOT TO EXCEED 45 FEET.
4. FOR SIDEWALK ADJACENT TO THE CURB AND POURED AT THE SAME TIME AS THE CURB, THE JOINT BETWEEN THEM SHALL BE A TROWELED JOINT WITH A MIN. 1/2" RADIUS.
5. SIDEWALK SHALL HAVE A MINIMUM THICKNESS OF 6 INCHES IF MOUNTABLE CURB IS USED OR IF SIDEWALK IS INTENDED AS PORTION OF DRIVEWAY. OTHERWISE SIDEWALK SHALL HAVE A MINIMUM THICKNESS OF 4 INCHES.
6. DRAIN BLOCKOUTS IN CURBS SHALL BE EXTENDED TO BACK OF SIDEWALK WITH 3" DIAMETER PLASTIC PIPE AT 2% SLOPE. CONTRACTION JOINT TO BE PLACED OVER PIPE.

C:\04\0682\100 General Services\CAD\X-1.dwg Oct/31/05



DATE:	BY:	REVISION

CONCRETE SIDEWALK

SCALE:	N.T.S
APPVD:	BAB
DATE:	10/05
DWG NO.:	416