


PLAN  
SIDEWALK NEXT TO CURB

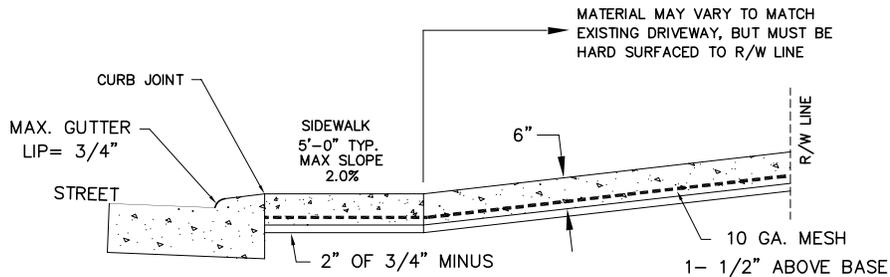

SECTION BBABB


NOTE: COMMERCIAL DRIVEWAYS

- 1) CONCRETE SHALL BE AIR ENTRAINED 3300 PSI(MIN. BREAKING STRENGTH @ 28 DAYS) WITH A SLUMP BETWEEN 1 1/2" TO 3".  
TOTAL AIR CONTENT (PERCENTAGE BY VOLUME OF CONCRETE) SHALL NOT BE LESS THAN 4 PERCENT OR MORE THAN 7 PERCENT.
- 2) CURB JOINT SHALL BE TROWELED WITH A MINIMUM 1/2" RADIUS ALONG BACK OF CURB.
- 3) EXPANSION JOINTS SHALL BE 1/2" ASPHALT IMPREGNATED MATERIAL OR EQUAL. EXTENDING FROM SUBGRADE TO FINSH GRADE.
- 4) CONTRACTION JOINT SPACING SHALL BE A MAXIMUM OF 12'.

NOTE: COMMERCIAL DRIVEWAY

40'-0" MAX. - 15'-0" MIN. WIDTH  
6" x 6" 10 GA. WIRE MESH

C:\04\0682\100 General Services\CAD\X-1.dwg Oct/31/05



DATE:	BY:	REVISION

**COMMERCIAL DRIVEWAY  
(WITH CURB TIGHT SIDEWALK)**

SCALE:	N.T.S
APPVD:	BAB
DATE:	10/05
DWG NO.:	412