


PLAN
SIDEWALK AWAY FROM CURB

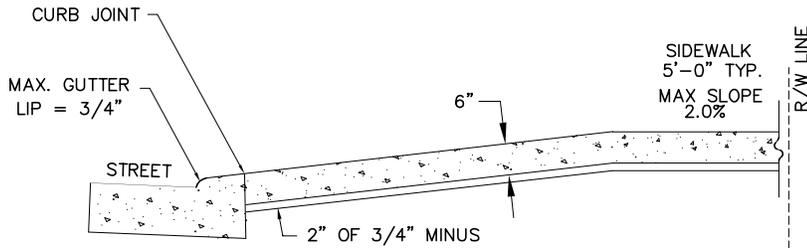

SECTION ABABA


NOTE: RESIDENTIAL DRIVEWAY

LOT FRONTAGE WIDTH	MINIMUM DRIVEWAY	MAXIMUM DRIVEWAY
UP TO 50 FEET	12 FEET	24 FEET
FROM 51 FEET TO 60 FEET	12 FEET	24 FEET + 1 FOOT/FOOT OF LOT FRONTAGE IN EXCESS OF 50 FEET
GREATER THAN 60 FEET	12 FEET	35 FEET

NOTE: RESIDENTIAL DRIVEWAYS

- 1) CONCRETE SHALL BE AIR ENTRAINED 3300 PSI(MIN. BREAKING STRENGTH @ 28 DAYS) WITH A SLUMP BETWEEN 1 1/2" TO 3".
TOTAL AIR CONTENT (PERCENTAGE BY VOLUME OF CONCRETE) SHALL NOT BE LESS THAN 4 PERCENT OR MORE THAN 7 PERCENT.
- 2) CURB JOINT SHALL BE TROWELED WITH A MINIMUM 1/2" RADIUS ALONG BACK OF CURB.
- 3) EXPANSION JOINTS SHALL BE 1/2" ASPHALT IMPREGNATED MATERIAL OR EQUAL.EXTENDING FROM SUBGRADE TO FINSH GRADE.
- 4) CONTRACTION JOINT SPACING SHALL BE A MAXIMUM OF 12'.

C:\04\0682\100 General Services\CAD\X-1.dwg Oct/31/05



DATE:	BY:	REVISION

**RESIDENTIAL DRIVEWAY
(SIDEWALK WITH PLANTER STRIP)**

SCALE:	N.T.S
APPVD:	BAB
DATE:	10/05
DWG NO.:	413